

ATLANTECH LUX SMALL model for the installation of lighting poles, buried type, with a maximum diameter at the base of 148 mm

The following maximum stresses at the base due to the loads applied on the lighting pole were considered for the verification of the Atlantech Lux Small foundation.

| | Maximum stress |
|-----------------|----------------|
| Horizontal load | 210 kg |
| Bending moment | 985 kgm |


The Atlantech Lux Small foundation, loaded with the above stresses, is verified with soils having the following minimum geotechnical characteristics.

Cohesive soils

| Cohesion not drained | $Cu = 0.5 \ kg/cm^2 = 5.000 \ kg/m^2$ |
|----------------------|--|
| | Weight = $\gamma = 1.900 \text{ kg/m}^3$ |

Cohesionless soils

| Cut resistance angle | $arphi=30^{\circ}$ |
|----------------------|-------------------------------|
| | $Weight = y = 1.900 \ kg/m^3$ |

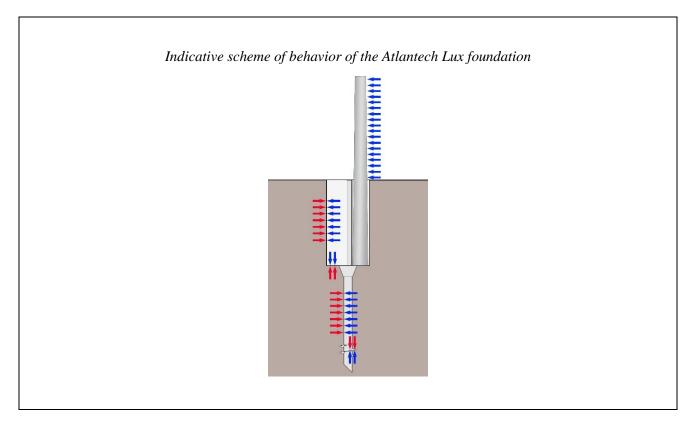

ATLANTECH SRL VIALE DEL LAVORO 9, 37060 BONFERRARO DI SORGÀ VERONA (ITALIA) T. +39 347 3201905 F. +39 045 6656875 C.F. E P.IVA: 04141110231 INFO@ATLANTECH.IT WWW.ATLANTECH.IT